

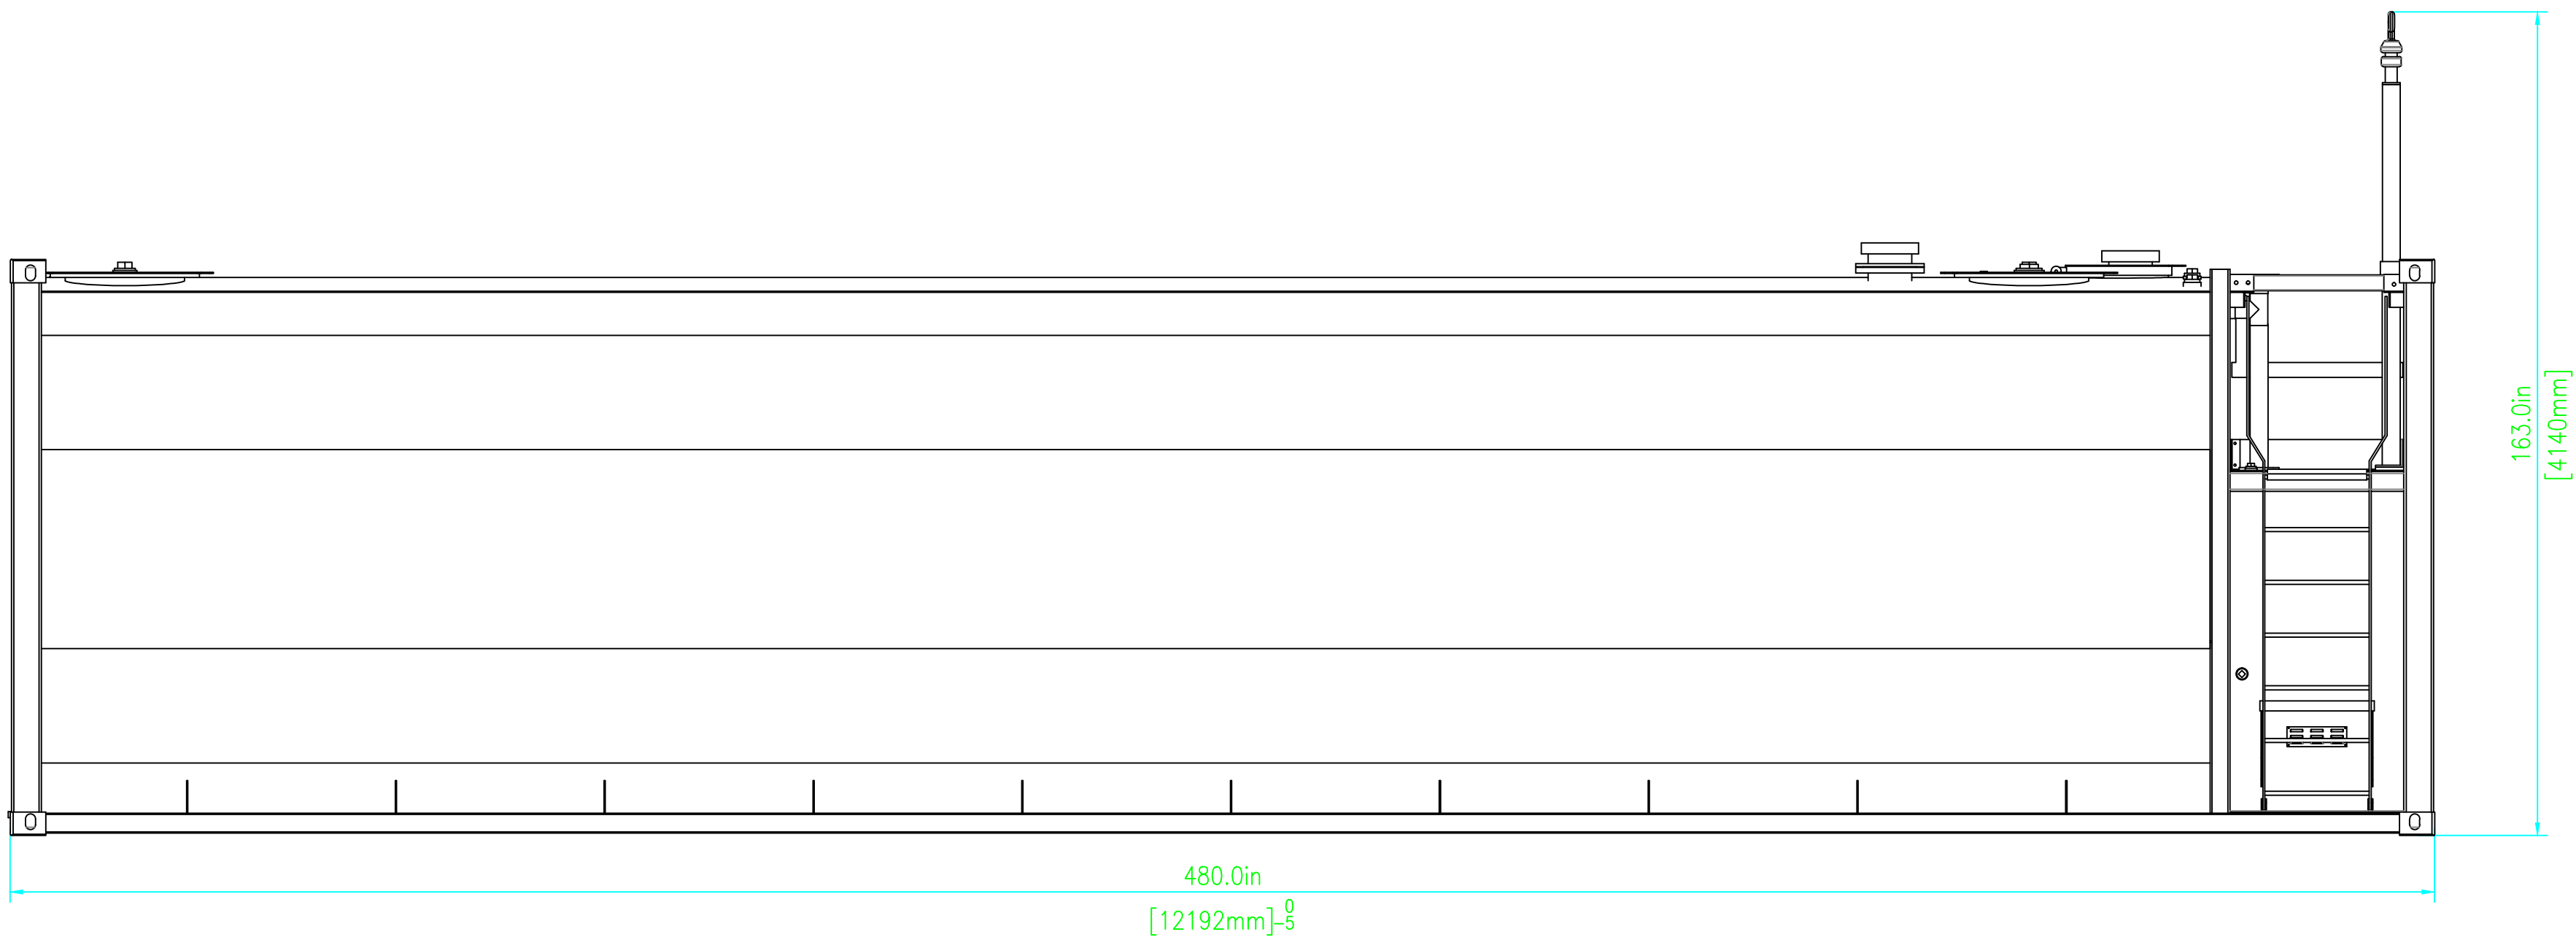



TANK DATA	
TANK CONTENTS:	DIESEL,FLAMMABLE,LUBRICANTS & SOLVENTS
DESIGNED TO:	AS1940,UL142,ULCS601
BUILT TO:	AS1692,CAT.3,UL142,ULCS601
OUTER WALL THICKNESS / INNER WALL THICKNESS	6mm / 6mm
GROSS VOLUME:	69,020 LITRES / 18,233 US GAL
SAFE FILL LEVEL:	65,570 LITRES / 17,321 US GAL
TOTAL MASS:	14,050 KG / 30,974 LB

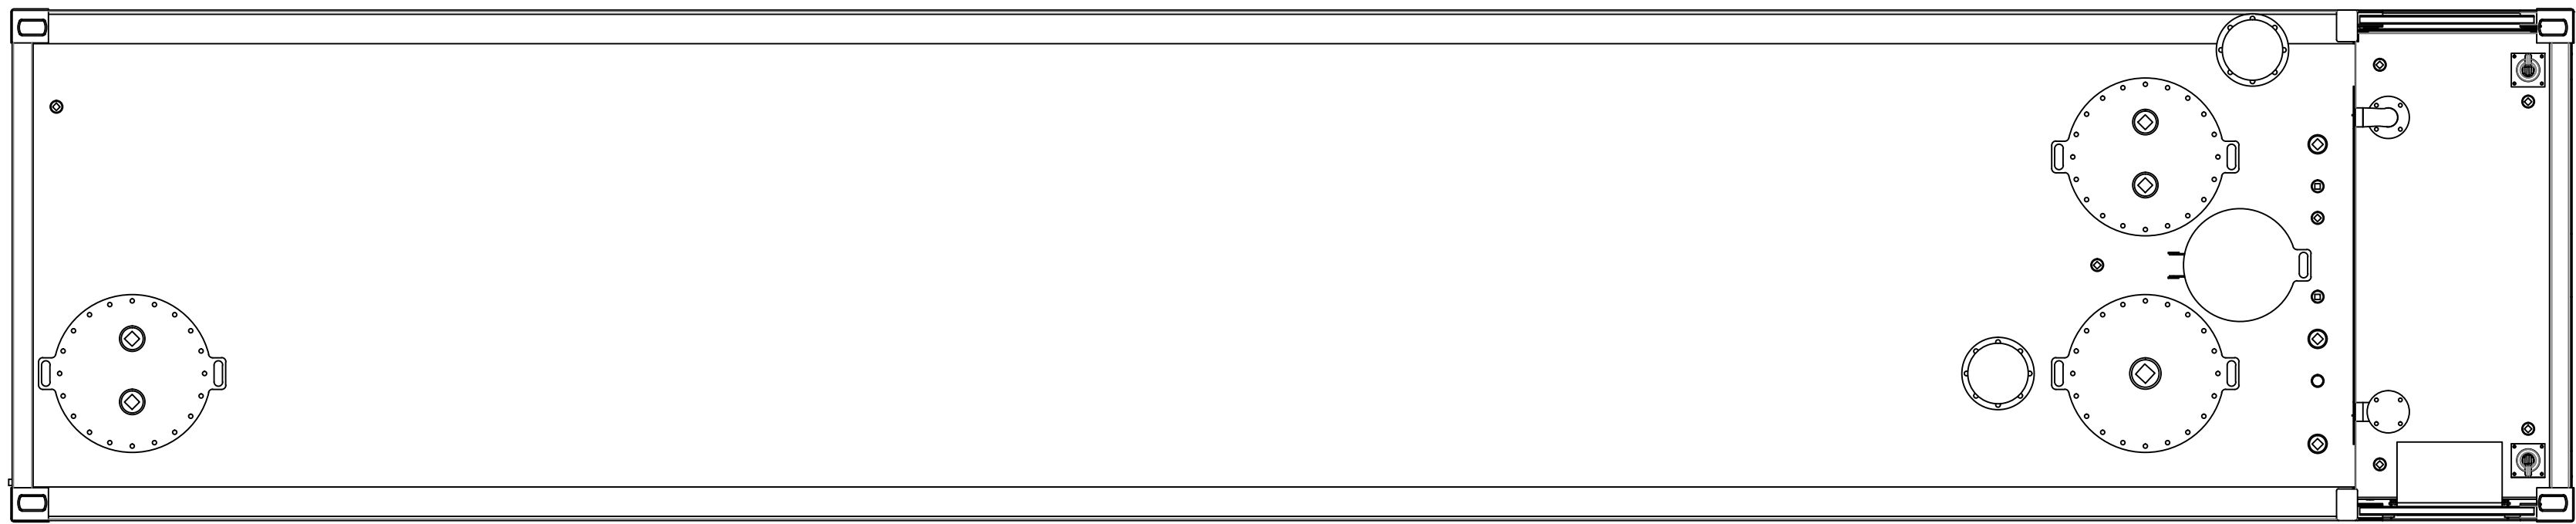





REMOVABLE
HOSE MAST

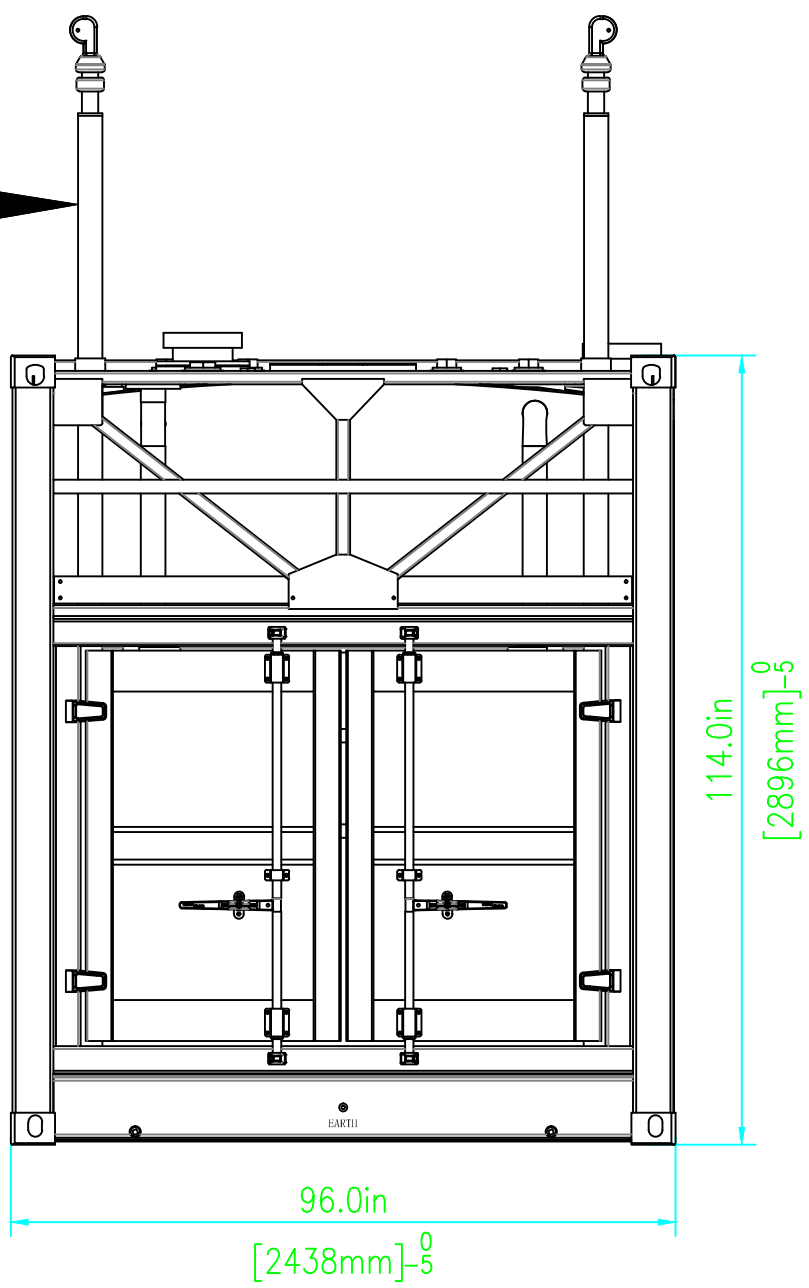

DOMED TOP
FOR RUNOFF

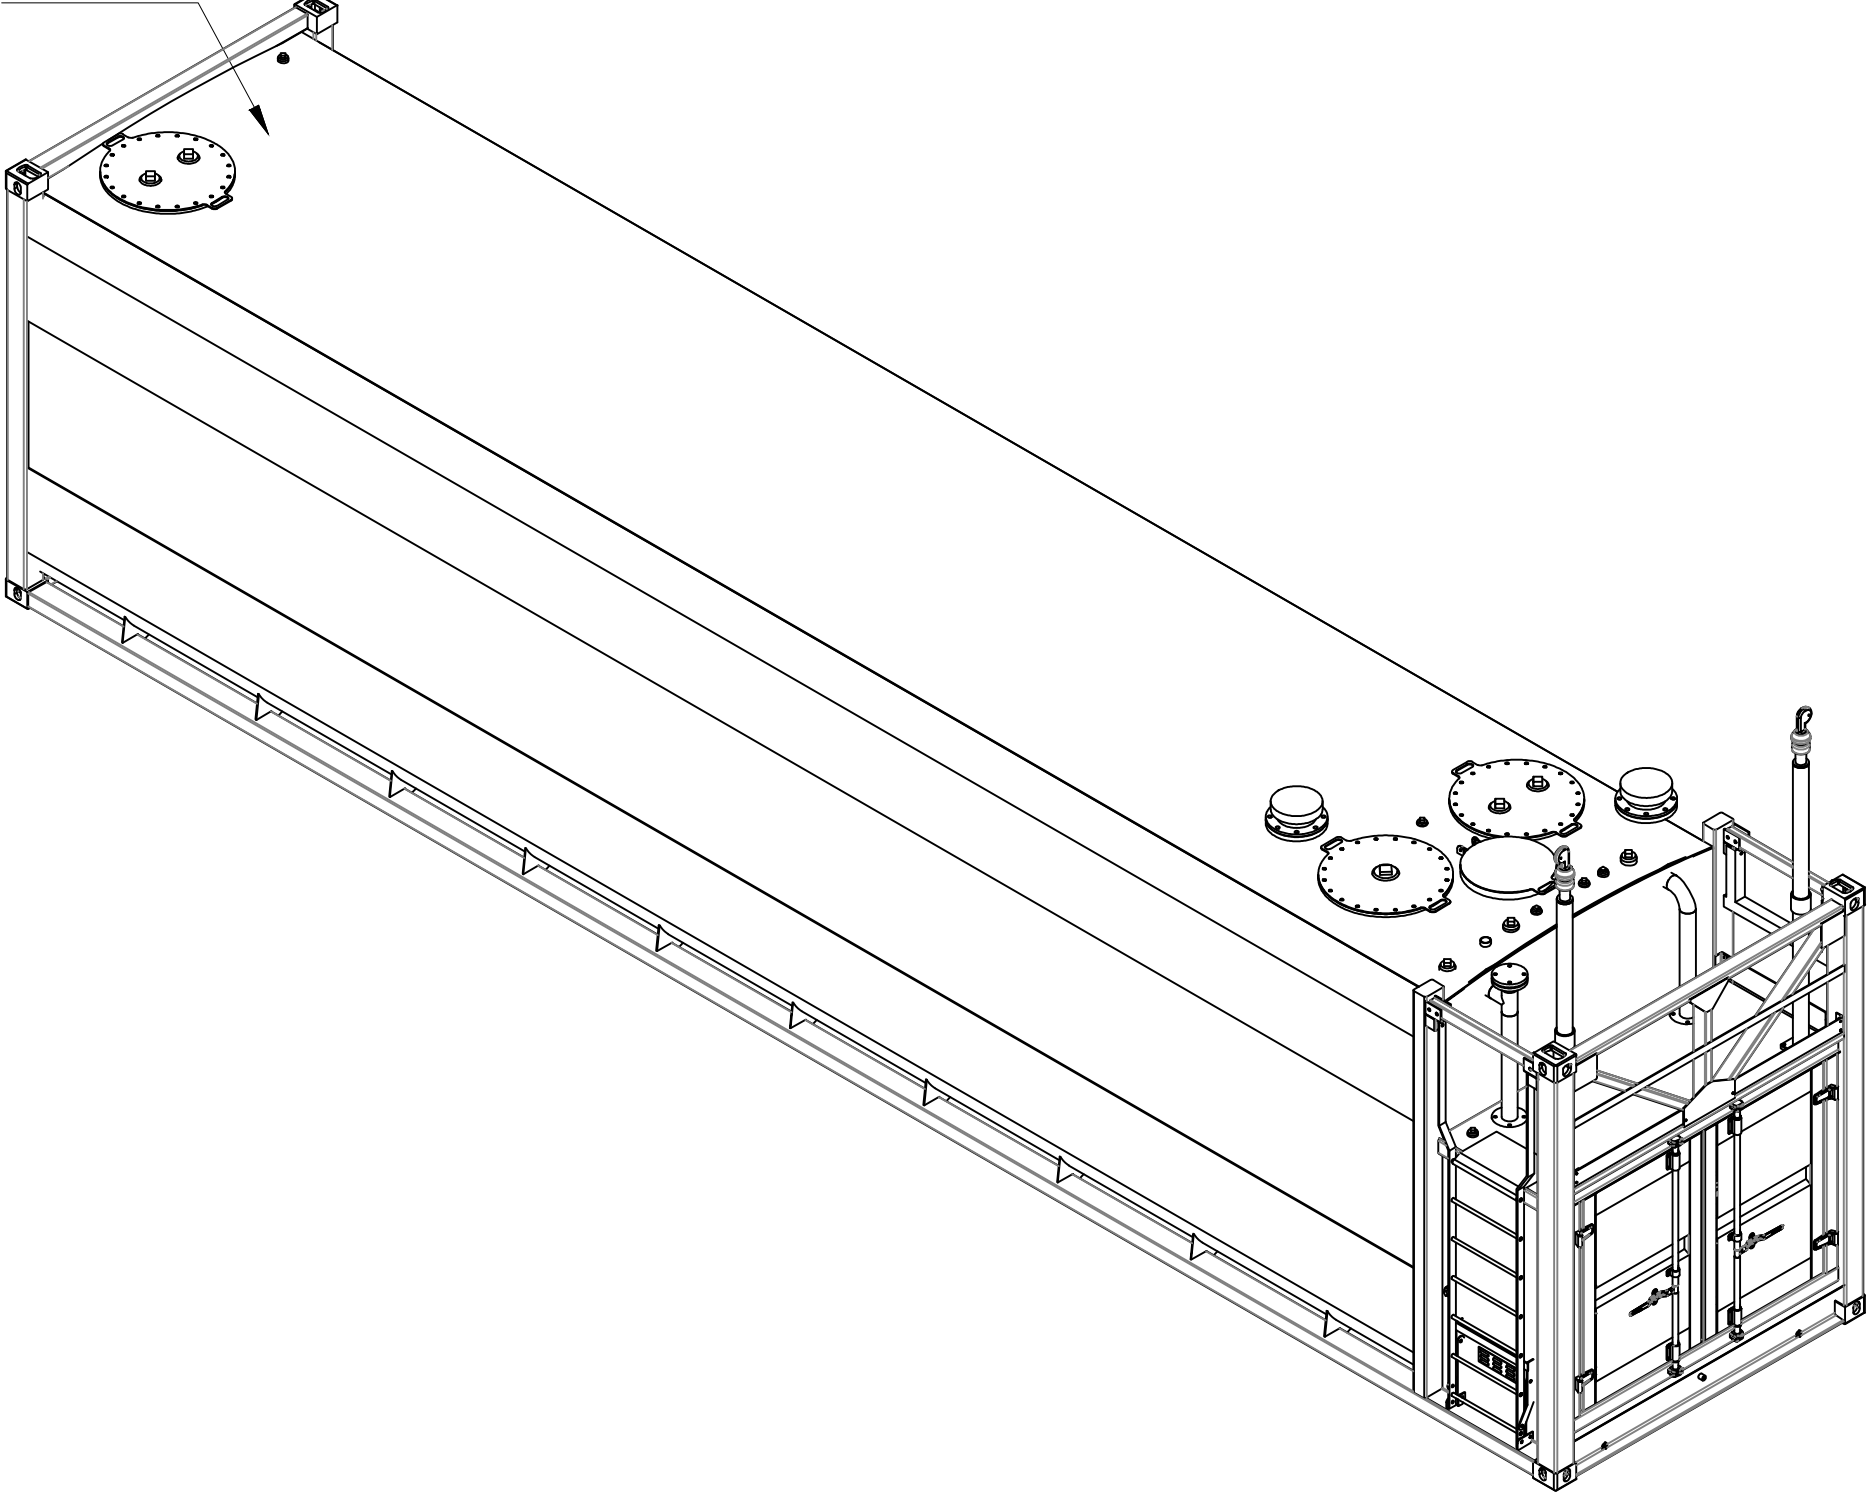


COPYRIGHT 2019 THE CONTENTS OF THIS DRAWING REMAINS THE PROPERTY OF UNITYFUEL TANKS		TOLERANCES : ALL DIMENSIONS IN MM UNLESS STATED OTHERWISE, ALL TOLERANCES TO BE AS FOLLOWS: 0 0.00 ANG			TITLE : UNITYFULE ABOVE GROUND TANKS			
					PART NO : G68 LAYOUT			
DESIGN	SIGN	DATE	MATERIAL	WEIGHT	DWG. NO. UNITYFULE-G68-DR001			
CHECKED	CHEN KAI	2020.7.25	Q235B	14,050 kgs				
VERIFIED					SHEET : 1 TOTAL SHEET : 2 SCALE : NTS			
APPROVED								

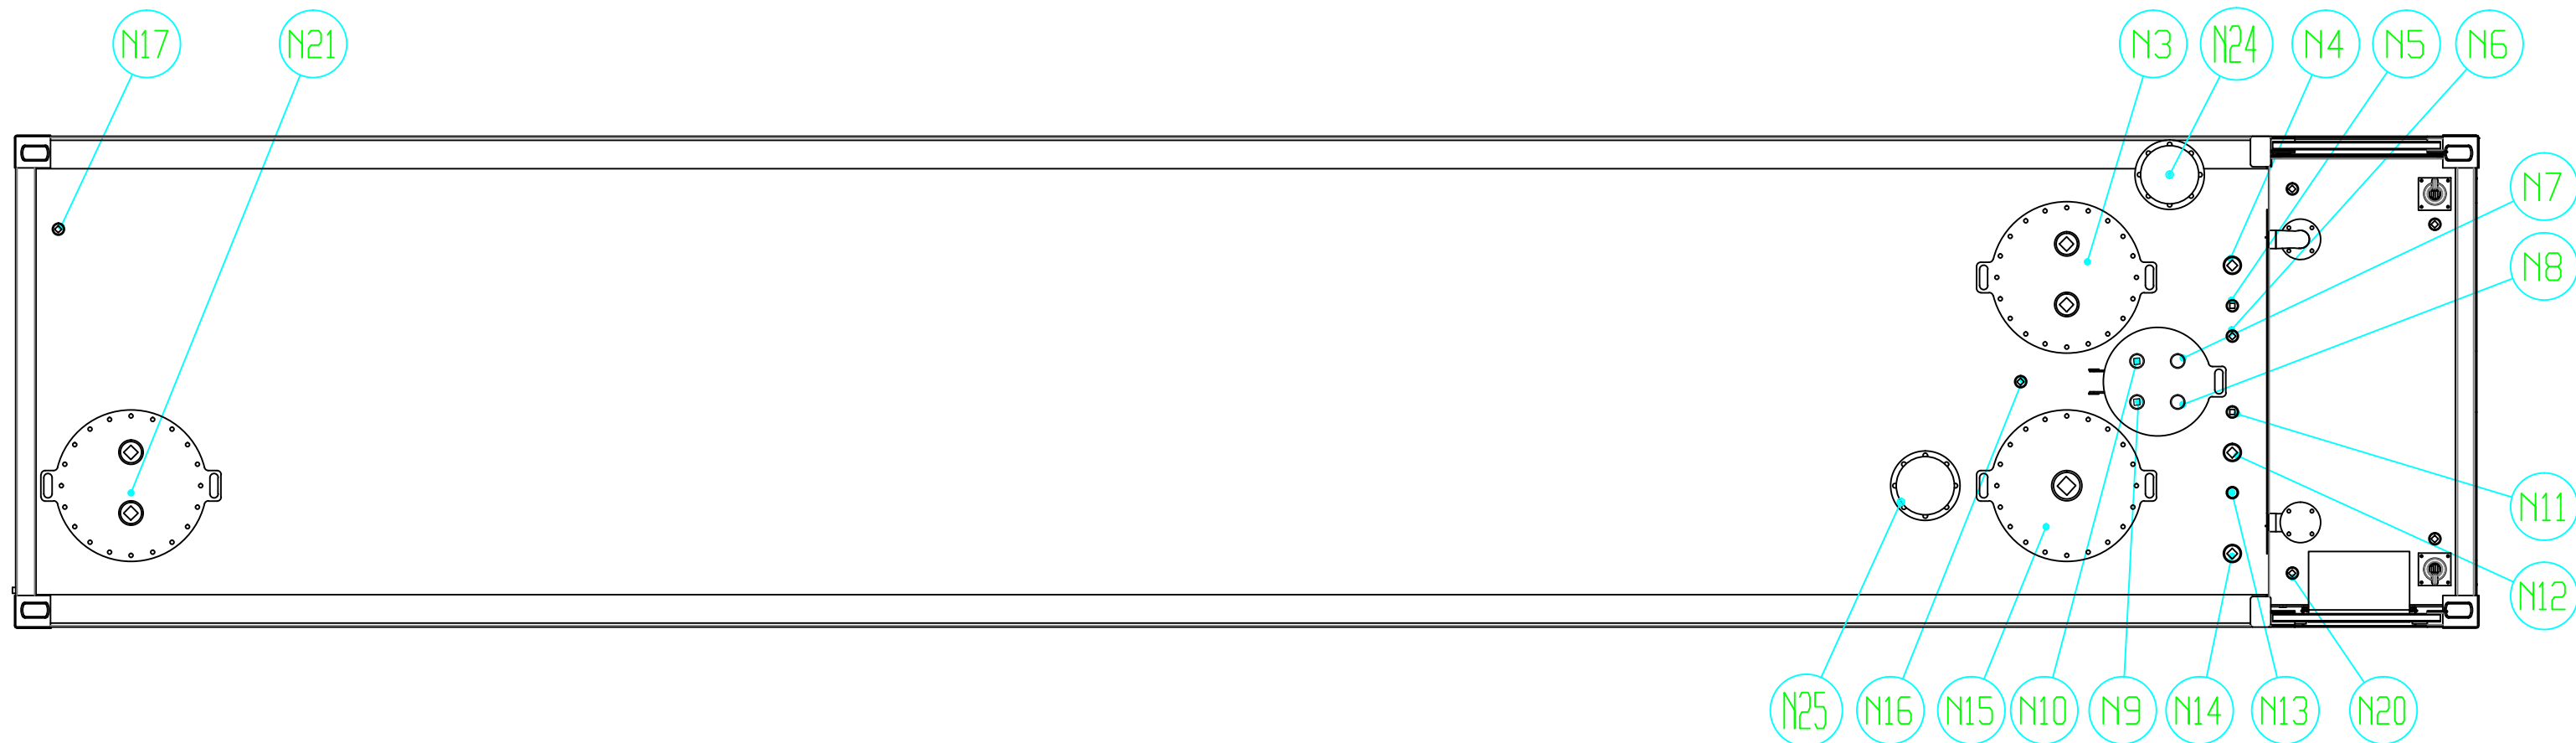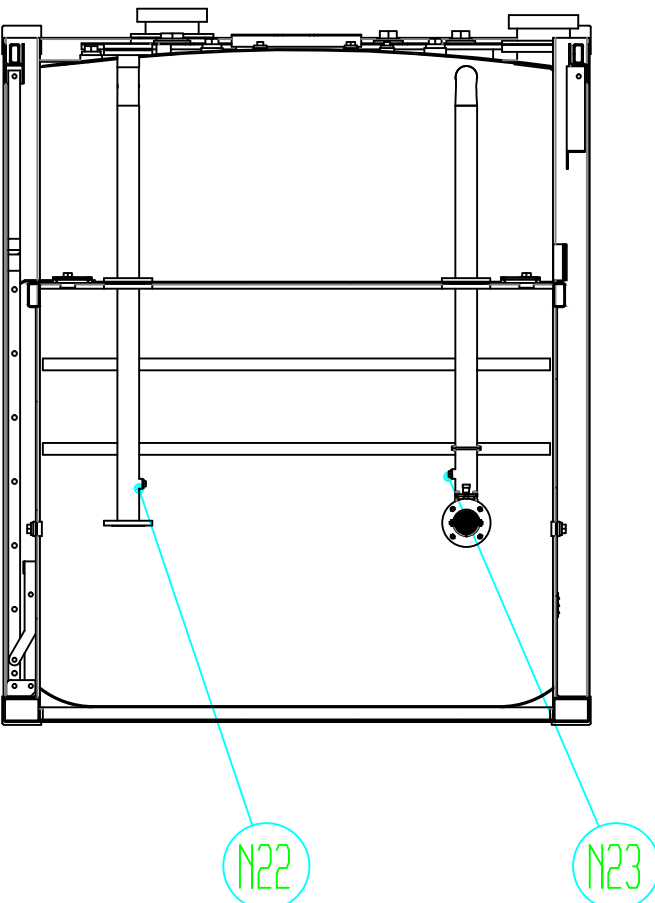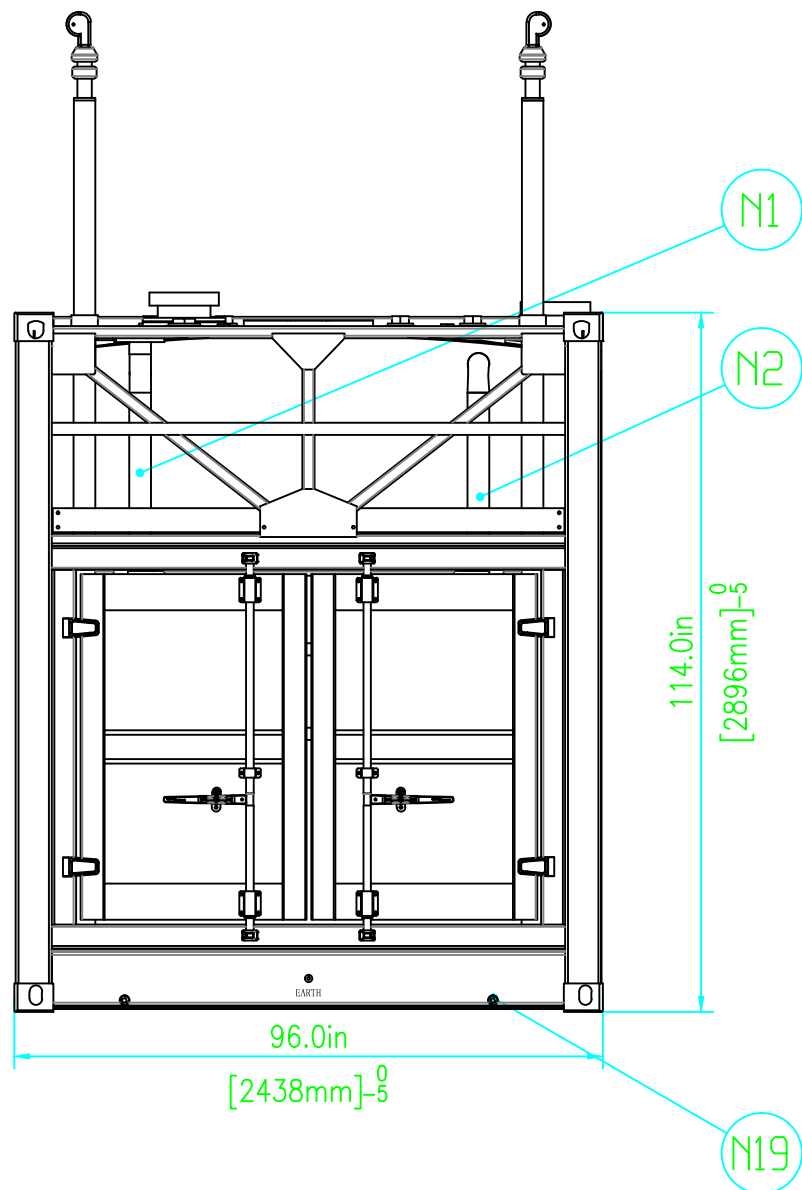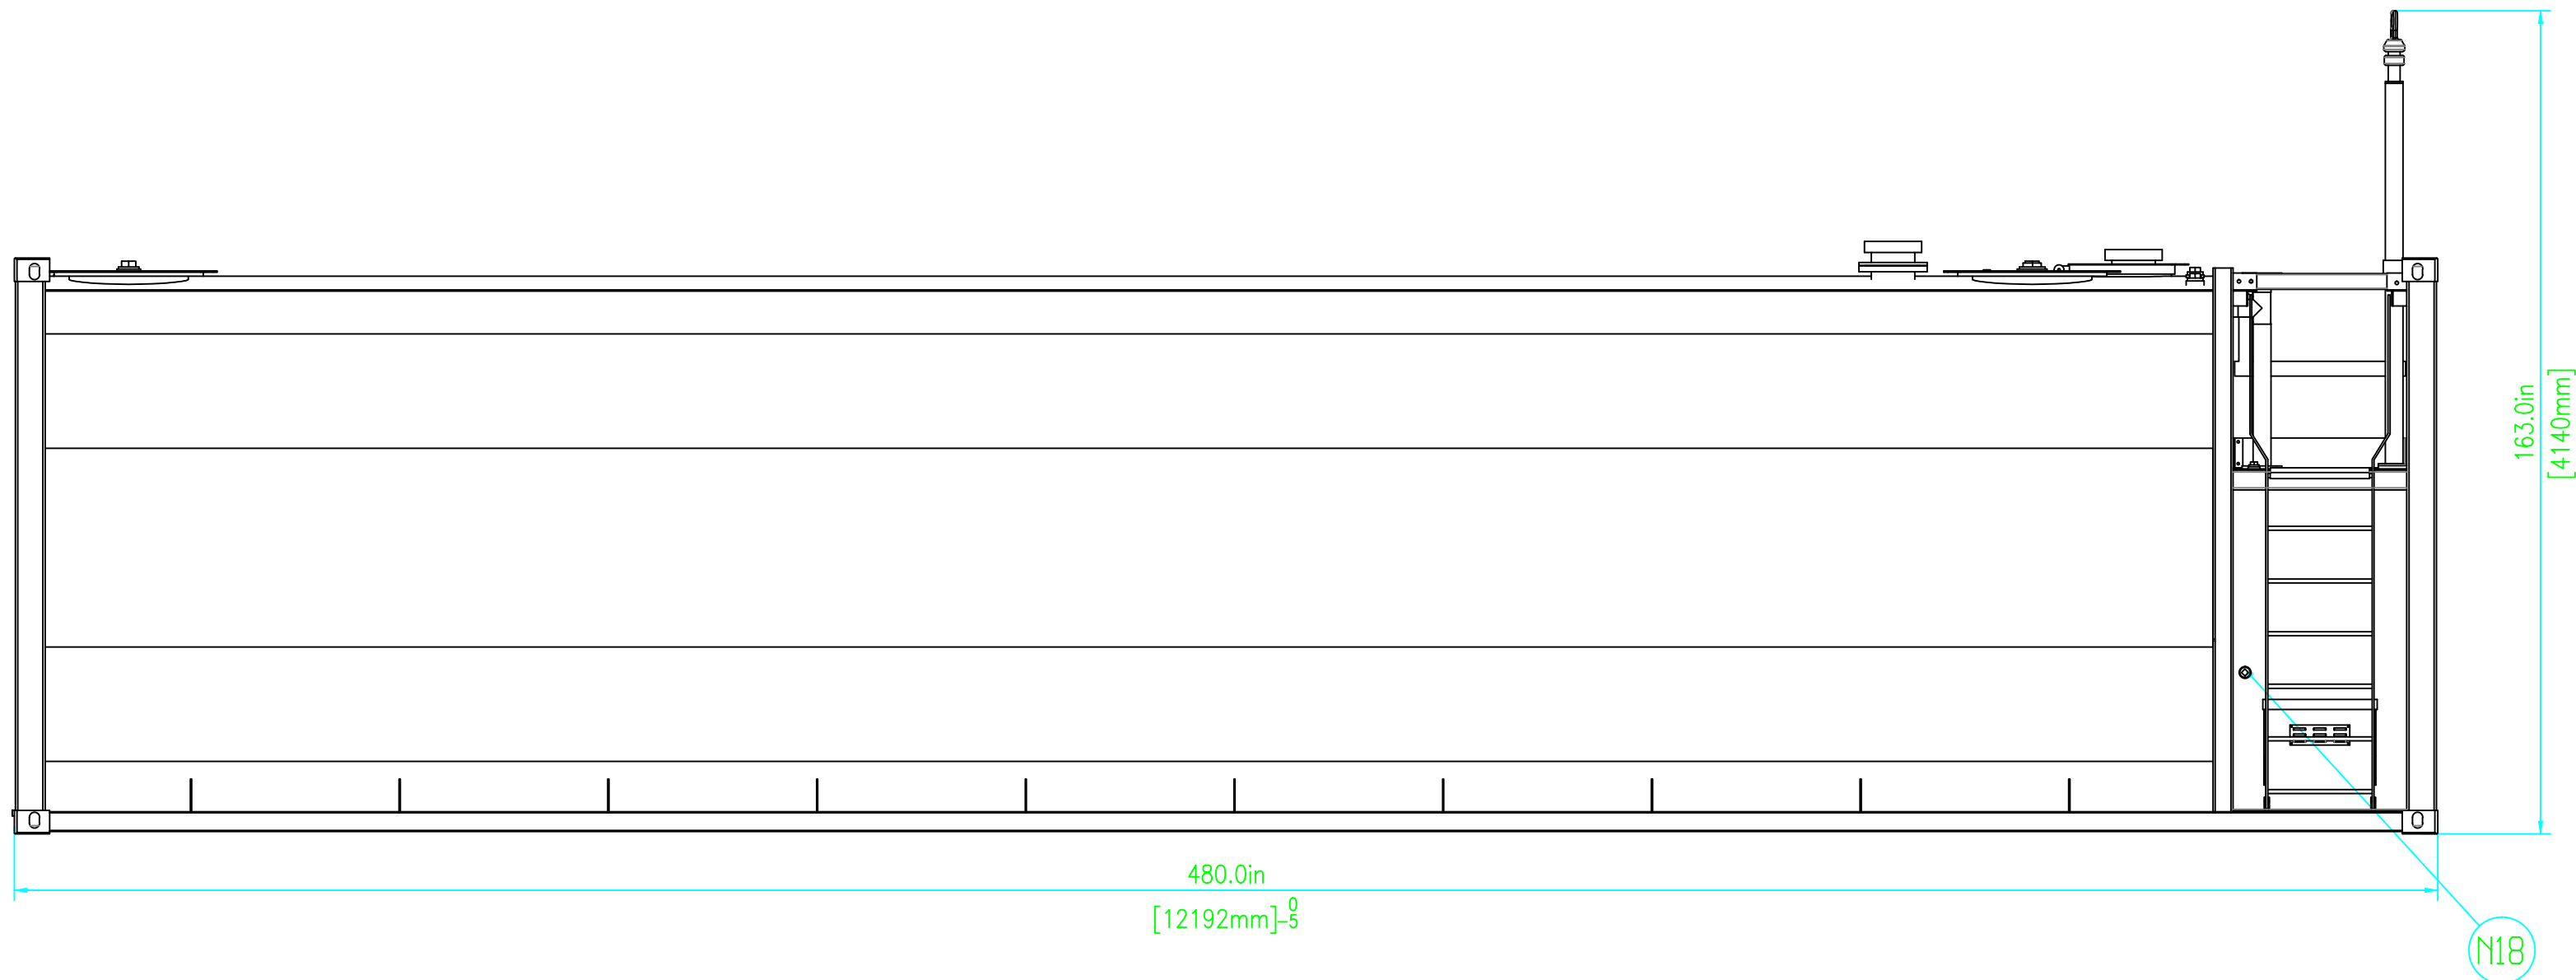

NOZZLE NO.	SIZE	CONNECTION TYPE	DESCRIPTION
N1	DN80	ANSI CLASS 150 FLANGE	SUCTION C/W DN80 PIPE 110mm FROM FLOOR & ANTI-SYPHON VALVE
N2	DN80	ANSI CLASS 150 FLANGE	FILL PIPE C/W DN80 PIPE W/ ELBOW 44mm FROM FLOOR & OVERFILL PROTECTION VALVE AND SPOOL
N3	600	MANWAY	600mm MANWAY C/W DN100 x 75 NPT-F SOCKET FOR SUB PUMP
N4	DN80	NPT-F x 75 LONG	SPARE / GAUGE / VENT
N5	DN50	NPT-F x 50 LONG	SPARE / GAUGE / VENT
N6	DN50	BSP-F x 50 LONG	OVERFILL WARNING ALARM
N7	DN50	BSP-M x 35 LONG	PRIMARY TANK DIP C/W DN50 PIPE 25mm HIGH OPENING FROM DIP STRIKE
N8	DN50	BSP-M x 35 LONG	INTERSTITIAL SPACE DIP
N9	DN50	NPT-F x 50 LONG	SPARE / GAUGE / VENT
N10	DN50	NPT-F x 50 LONG	SPARE / GAUGE
N11	DN50	BSP-F x 50 LONG	INTERSTITIAL SPACE EMERGENCY VENT
N12	DN80	NPT-F x 75 LONG	SPARE / GAUGE / VENT
N13	DN50	BSP-M x 35 LONG	WATER DRAIN
N14	DN80	NPT-F x 75 LONG	FREE VENT
N15	600	MANWAY	600mm MANWAY C/W DN150 x 75 BSP-F SOCKET FOR SUB PUMP
N16	DN50	NPT-F x 50 LONG	SPARE / GAUGE / VENT
N17	DN50	NPT-F x 50 LONG	SPARE / GAUGE / VENT
N18	DN50	NPT-F x 50 LONG	SPARE (INTO PUMP BAY) / EXTERNAL ELECTRICALS
N19	DN25	NPT-F x 45 LONG	PUMP BUND DRAIN
N20	DN50	NPT-F x 50 LONG	SPARE (INTO PUMP BAY) / EXTERNAL ELECTRICALS
N21	600	MANWAY	600mm MANWAY C/W DN100 x 75 NPT-F SOCKET FOR SUB PUMP
N22	DN25	NPT-F x 35 LONG	SPARE
N23	DN25	NPT-F x 35 LONG	SPARE
N24	DN200	ANSI CLASS 150 FLANGE	DN200 INTERSTITIAL SPACE EMERGENCY VENT
N25	DN200	ANSI CLASS 150 FLANGE	DN200 PRIMARY TANK EMERGENCY VENT

BSP-F: BSP FEMALE THREAD
BSP-M: BSP MALE THREAD
NPT-F: NPT FEMALE THREAD
NPT-M: NPT MALE THREAD

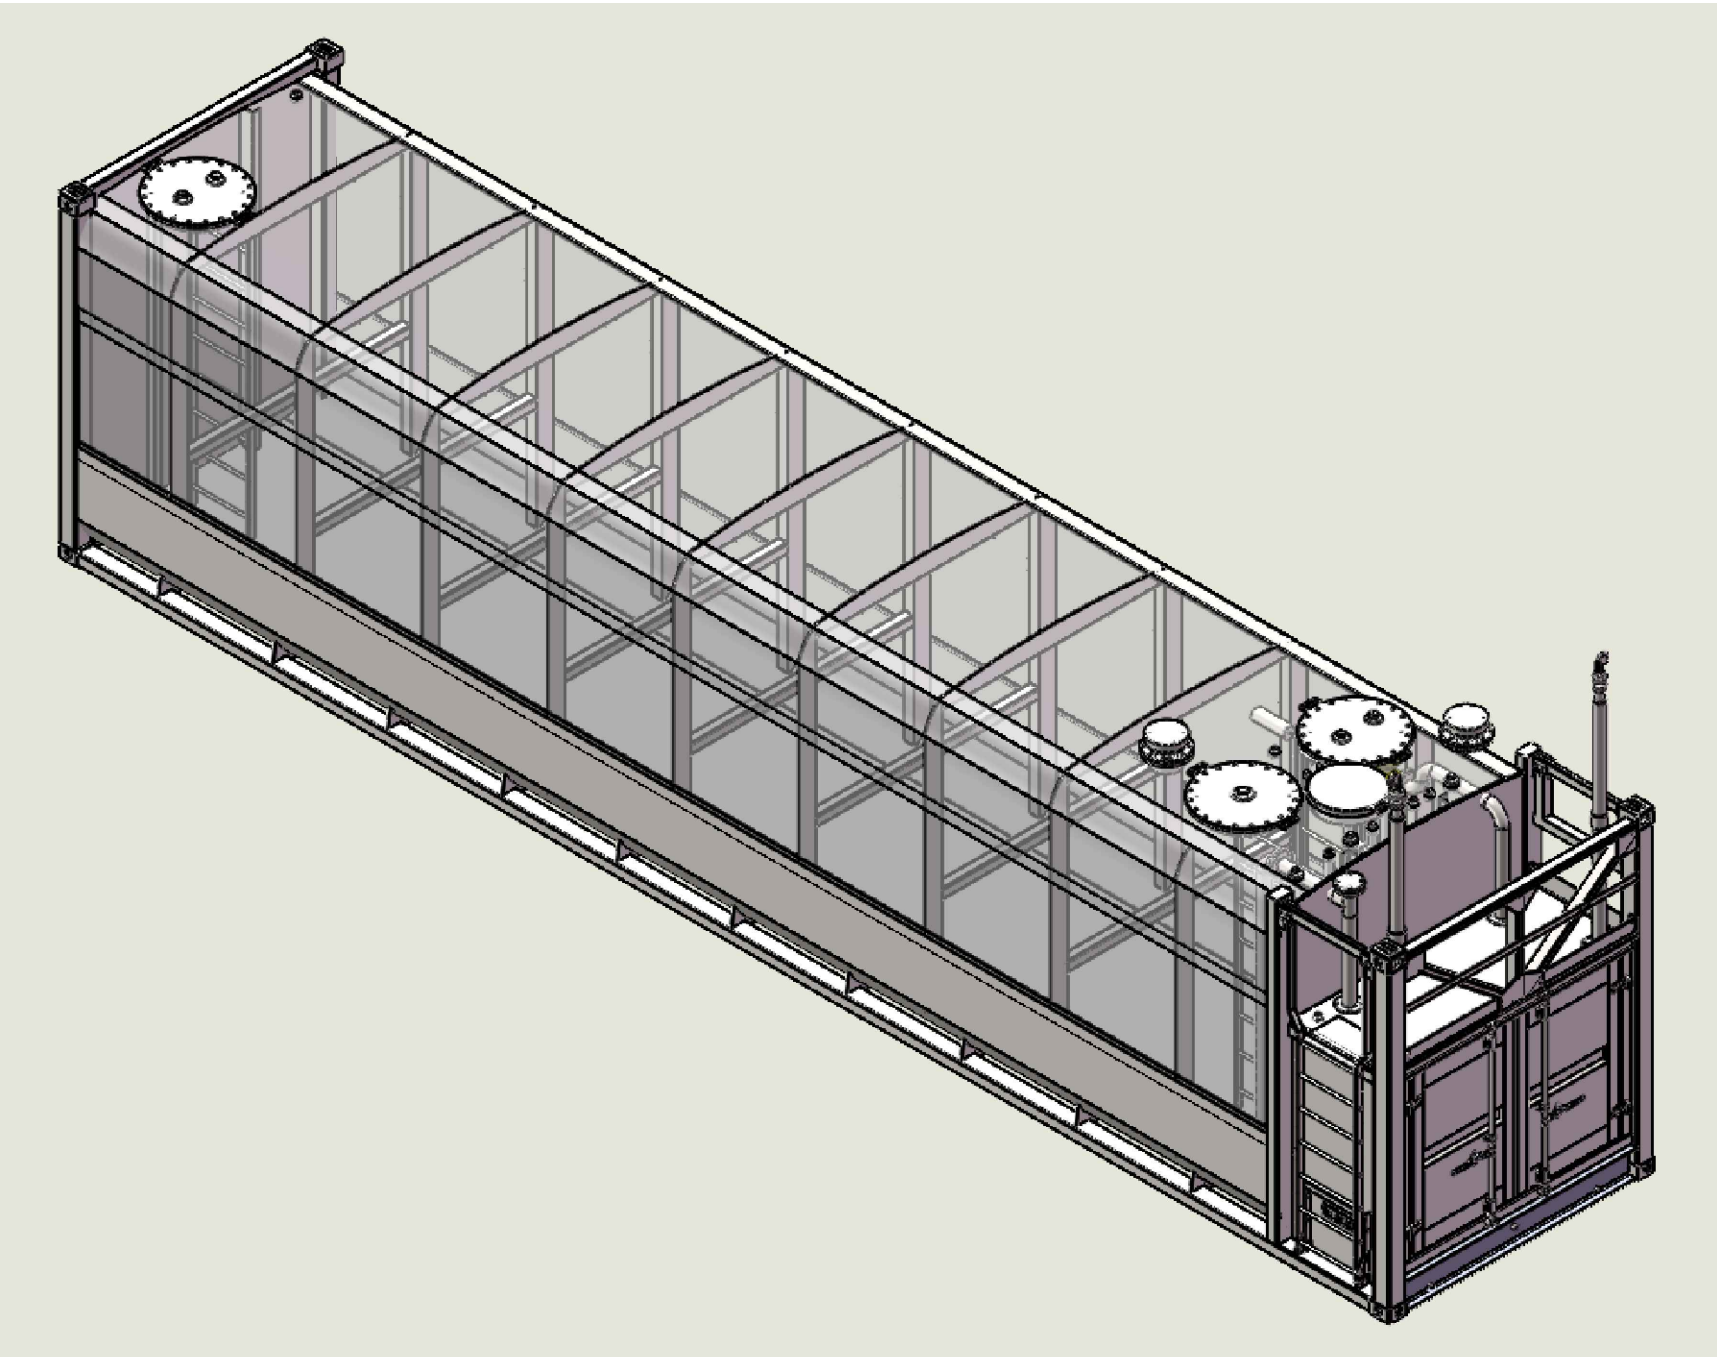

COPYRIGHT 2019 THE CONTENTS OF THIS DRAWING REMAINS THE PROPERTY OF UNITYFULE TANKS			TOLERANCES : ALL DIMENSIONS IN MM UNLESS STATED OTHERWISE, ALL TOLERANCES TO BE AS FOLLOWS: 0.0 : 0.00 : ANG : : UNITY FUEL SOLUTIONS			TITLE : UNITYFULE ABOVE GROUND TANKS						
						PART NO : G68 LAYOUT						
						DESIGN	SIGN	DATE	MATERIAL	WEIGHT	DWG. NO. UNITYFULE-G68-DR002	
						CHECKED	CHEN KAI	2020.7.25	Q235B	14,050 kgs		
						VERIFIED				REVISION 01	SHEET : 2 TOTAL SHEET : 2 SCALE : NTS	
APPROVED												